



**PATENT APPLICATION**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of

Docket No: Q76292

Stefaan Jozef DE CNODDER, et al.

Appln. No.: 10/608,495

Group Art Unit: 2661

Confirmation No.: 8654

Examiner: Not Assigned

Filed: June 30, 2003

For: TELECOMMUNICATION NETWORK WITH FAST-REROUTE FEATURES

**SUBMISSION OF PRIORITY DOCUMENT**

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Sir:

Submitted herewith is a certified copy of the priority document on which a claim to priority was made under 35 U.S.C. § 119. The Examiner is respectfully requested to acknowledge receipt of said priority document.

Respectfully submitted,

David J. Cushing  
Registration No. 28,703

SUGHRUE MION, PLLC  
Telephone: (202) 293-7060  
Facsimile: (202) 293-7860


WASHINGTON OFFICE

**23373**

CUSTOMER NUMBER

Enclosures: Europe 02291628.2

Date: January 12, 2004





**Eur päisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

02291628.2

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**





Anmeldung Nr:  
Application no.: 02291628.2  
Demande no:

Anmeldetag:  
Date of filing: 01.07.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

ALCATEL  
54, rue la Boétie  
75008 Paris  
FRANCE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Telecommunication network with fast-reroute features

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04L12/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR



## TELECOMMUNICATION NETWORK WITH FAST-REROUTE FEATURES

The present invention relates to a method to release, by means of a Path\_Tear Message, a Label Switched Path [LSP] established  
5 between linked routers of a telecommunication network, said routers being linked in cascade according to a Main Path and being further linked in another order according to at least one Detour Path.

Such a telecommunication network with fast-reroute features is generally known in the art. Therein, a call from an ingress router, say  
10 router A, to a receiver router, say router E, is transmitted through a "Label Switched Path" [LSP] set-up by means of "Path Messages" transmitted via the linked routers, say routers B, C and D. From the ingress router A to the receiver router E, the Path Messages are transmitted through the routers linked in a first predetermined order,  
15 e.g. A - B, B - C, C - D and D - E, in order to set up a Main LSP, and through the routers linked in another predetermined order, e.g. A - C, B - D and/or C - E to set up Detour LSPs. In this way, in case of failure of a link, there exists always an alternative solution.

When, for instance, the call is ended or when the ingress  
20 router A wants to reroute the paths, both the Main LSP and the Detour LSPs have to be cancelled. To cancel a LSP, a "Path\_Tear Message" is sent by the ingress router A towards the receiver router E. Each router receiving the Path\_Tear Message releases the corresponding Label Switched Path (LSP).

25 Because of interoperable reasons, a merging router, i.e. a router where the Main LSP and at least one Detour LSP merge, needs to receive a Path\_Tear Message both from the Main LSP and from the Detour LSP(s) prior to cancel a call. If not, the merging router has to wait for a timeout of 1 to 2 minutes prior to propagate downstream the  
30 received Path\_Tear Message. Indeed, in case only one Path\_Tear

Message is received at a merging router, e.g. over a Detour LSP, this router is not able to know whether or not the Path\_Tear Message is to release only the Detour LSP or to release the whole LSP, i.e. including the Main LSP and possible other Detour LSPs. By default, the merging  
5 router always assumes the former, but when it receives also a Path\_Tear Message from the Main LSP, it knows that the whole LSP has to be torn down. However, in case of a failure, the Path\_Tear Message will never arrive over the Main LSP and it has to wait for the above-mentioned long timeout of typically 1 to 2 minutes.

10 An object of the present invention is to provide a telecommunication network with fast-reroute features of the above known type but wherein the decision to releasing one or more Label Switched Paths [LSP] is taken much faster.

According to the invention, this object is achieved due to the fact  
15 that said Path\_Tear Message includes a tag indicating, to the router receiving said Path\_Tear Message, whether said Path\_Tear Message should be immediately forwarded towards a downstream located router.

In this way, it is possible to obtain a faster release of any  
20 unused Label Switched Path [LSP] than waiting for the above-mentioned 1 to 2 minutes timeout.

Another characterizing embodiment of the present invention is that said tag further indicates through which of said Main Path or said Detour Path or both, starting from the receiving router, said Path\_Tear  
25 Message should be immediately forwarded towards said downstream-located router.

The Path\_Tear Message is thereby easily propagated downstream through the whole telecommunication network.

Another characterizing embodiment of the present invention is  
30 that, for said router receiving said Path\_Tear Message, said release



method further comprises a step of releasing all the Label Switched Paths arriving at this receiving router from upstream-located routers via the Main Path and via the Detour Path linking said upstream-located routers and said receiving router.

5 All the upstream Label Switched Paths are thereby also cancelled.

In a preferred embodiment, said tag further indicates which Label Switched Paths to release, and, for the router receiving said Path\_Tear Message, said release method comprises a step of releasing  
10 immediately each Label Switched Path indicated by said tag.

More particularly, said tag is a Sender Template whereof can be derived the Label Switched Paths to be release.

This is particularly useful in case the ingress router initiates the path release.

15 The present invention also relates to a telecommunication network with a plurality of routers interconnected via links through which Label Switched Paths are established, said routers being linked in cascade according to a Main Path and being further linked in another order according to at least one Detour Path, and said routers  
20 being adapted to transmit a Path\_Tear Message towards downstream-located routers, said Path\_Tear Message indicating that a Label Switched Path has to be released.

In the telecommunication network according to the present invention, the router transmitting said Path\_Tear Message is adapted  
25 to include in said Path\_Tear Message a tag indicating, to the router receiving said Path\_Tear Message, whether said Path\_Tear Message should be immediately forwarded towards a downstream-located router, and the receiving router is adapted to detect said tag in said received Path\_Tear Message, to release each Label Switched Path  
30 indicated by said tag, and, according to said tag, to forward

immediately said Path\_Tear Message towards said downstream-located router.

Owing to the tag, the Label Switched Path [LSP] can be released relatively fast.

5           In a preferred embodiment, the present invention is characterized in that said tag further indicates through which path said Path\_Tear Message should be forwarded downstream, and in that, according to said tag, said receiving router is further adapted to forward immediately said Path\_Tear Message towards said  
10 downstream-located router through said Main Path (AB, BC, CD, DE) or through said Detour Path (ac, ce, bd) or through both.

The Label Switched Paths are thereby released in an accurate way. Also in a preferred embodiment, the present invention is characterized in that the telecommunication network is a Multi-Protocol  
15 Label Switching [MPLS] telecommunication network.

Such a telecommunication network is particularly well adapted to handle several Label Switched Paths.

Further characterizing embodiments of the present telecommunication network with fast-reroute features and the Label  
20 Switched Path release method used therein are mentioned in the appended claims.

It is to be noticed that the term 'comprising', used in the claims, should not be interpreted as being restricted to the means listed thereafter. Thus, the scope of the expression 'a device comprising means A and B' should  
25 not be limited to devices consisting only of components A and B. It means that with respect to the present invention, the only relevant components of the device are A and B.

The above and other objects and features of the invention will become more apparent and the invention itself will be best understood by

referring to the following description of an embodiment taken in conjunction with the accompanying drawings wherein:

Fig. 1 represents a telecommunication network with fast-reroute features comprising a Main Label Switched Path and Detour Label Switched Paths according to the invention; and

Fig. 2 represents the telecommunication network of Fig. 1 with a link failure between two routers.

The simplified telecommunication network shown at Fig. 1 comprises an ingress router or Data Flow Sender A and a receiver router E interconnected by means of other routers or nodes B, C and D. This telecommunication network has fast-reroute features as will become clear later. It is for instance a well-known Multi-Protocol Label Switching [MPLS] telecommunication network.

In this network, a call from the sender or router A to the receiver or router E is initiated according to the known Resource Reservation Protocol [RSVP] or the like whereby "Label Switched Paths" [LSPs] are set-up by means of "Path Messages" transmitted from the router A to the router E via other linked routers such as B, C and D. The path Messages are transmitted through the routers A, B, C, D and E linked in this first order to form a Main route constituted by sections AB, BC, CD and DE. A like-named Main or Protected LSP is then set up on this route AB, BC, CD and DE. Additionally, path Messages are also transmitted through the routers A, B, C, D and E linked in a different order to form Detour routes such as sections ac, ce and bd. Like-named Detour LSPs are then set up on these routes ac, ce and bd.

Some of the routers are called "Merging Routers". A merging router is a router where at least two Label Switched Paths arrive. In this example, the routers C, D and E are merging routers.

Owing to the existence of Protected and Detour LSPs, in case of failure of a link or route, there exists always an alternative solution.

Indeed, if for instance, as shown at Fig. 2, there is a failure on the link BC between the routers B and C, two routes between A and E are still available:

- a preferred route via the Main LSP AB, Detour LSP bd and Main  
5 LSP DE;

- and another route via the Detour LSPs ac and Main LSPs CD and DE.

When, for instance, the call between the sender A and the receiver E is ended or when the sender A wants to reroute the paths or  
10 even when there is a LSP failure, both the Protected LSP and the Detour LSPs have to be cancelled. To cancel a LSP, a "Path\_Tear Message" is sent by the router that wants to cancel the LSP towards the receiver E. Each router receiving the Path\_Tear Message cancels the corresponding upstream Label Switched Path and forwards the  
15 Path\_Tear Message towards the downstream-located routers.

An extra object or tag is added in the Path\_Tear Message by the router that wants to cancel the LSP. This tag indicates which path(s) have to be released and is called "LSP\_Teardown\_Tag". In case the ingress router or sender A wants to cancel the LSP, the tag may be  
20 a "Sender Template".

On reception of a Path\_Tear Message, a merging router immediately checks whether or not the Path\_Tear Message, received over a Detour LSP, is to release only this Detour LSP or to release the complete LSP, i.e. the Main LSP as well as the Detour LSP(s). This is  
25 done by analyzing the tag in the Path\_Tear Message. Two cases may appear:

- if the Path\_Tear Message was initiated by the ingress router A, the merging router compares the source address of the sender with the Sender Template received as tag with the Path\_Tear Message; or

- more generally, the LSP\_Teardown\_Tag explicitly indicates which path(s) have to be released.

The latter case is preferred because in some implementations the source address is no longer visible by the Resource Reservation  
5 Protocol [RSVP]. Another advantage is that a Path\_Tear Message issued by the sender A does not necessarily imply that all the LSPs have to be released, which LSP to release is then indicated by the tag.

The LSP paths indicated by or derived from the tag are cancelled by the router receiving the Path\_Tear Message in the  
10 upstream direction towards routers located upstream with respect to this receiving router.

The receiving router further forwards the Path\_Tear Message downstream, i.e. towards routers, e.g. the receiver E, located downstream with respect to this receiving router.

15 It is to be noted that, to prevent that the upstream router B re-establishes a LSP with a "Path\_Refresh Message", the router C has to make sure that its "Local Path State" is not deleted immediately but is set to a stalled state.

It is also to be noted that, optionally, router C may send a  
20 "Resv\_Tear Message" (Reserved Tear Message) upstream, this Resv\_Tear Message may also contain a LSP\_Teardown\_Tag to indicate to the router downstream the failure that it may generate a Path\_Tear Message immediately. A Resv\_Tear Message is used to cancel a "Resv Message" (Reserved Message) that is an answer from the receiver E to  
25 the ingress router A to a path Message, which itself is the first packet of a call.

It is finally to be noted that in case of a telecommunication network using the Internet Protocol [IP], the source address is the IP source address of the sender.

A final remark is that embodiments of the present invention are described above in terms of functional blocks. From the functional description of these blocks, given above, it will be apparent for a person skilled in the art of designing electronic devices how embodiments of these  
5 blocks can be manufactured with well-known electronic components. A detailed architecture of the contents of the functional blocks hence is not given.

While the principles of the invention have been described above in connection with specific apparatus, it is to be clearly understood that this  
10 description is made only by way of example and not as a limitation on the scope of the invention, as defined in the appended claims.

### CLAIMS

1. A method to release, by means of a Path\_Tear Message, a Label Switched Path (LSP) established between linked routers (A, B, C, D, E) of a telecommunication network,

5       said routers being linked in cascade according to a Main Path (AB, BC, CD, DE) and being further linked in another order according to at least one Detour Path (ac, ce, bd),

**characterized in that** said Path\_Tear Message includes a tag indicating, to the router receiving said Path\_Tear Message, whether said Path\_Tear Message should be immediately forwarded  
10       towards a downstream-located router.

          2. The release method according to claim 1, **characterized in that** said Path\_Tear Message is received, in the receiving router, via a said Detour Path (ac, ce, bd) linking an upstream-located router  
15       to said receiving router.

          3. The release method according to claim 1, **characterized in that** said tag further indicates through which of said Main Path (AB, BC, CD, DE) or said Detour Path (ac, ce, bd) or both, starting from  
20       the receiving router, said Path\_Tear Message should be immediately forwarded towards said downstream-located router.

          4. The release method according to claim 1, **characterized in that**, for said router receiving said Path\_Tear Message, said release  
25       method further comprises a step of releasing all the Label Switched Paths (LSP) arriving at this receiving router from upstream-located routers via said Main Path (AB, BC, CD, DE) and via said Detour Path (ac, ce, bd) linking said upstream-located routers and said receiving  
30       router.

5. The release method according to claim 1, **characterized in that** said tag further indicates which Label Switched Paths (LSPs) to release, **and in that**, for the router receiving said Path\_Tear Message, said release method comprises a step of releasing immediately each Label Switched Path indicated by said tag.

6. The release method according to claim 5, **characterized in that** said tag is a Sender Template whereof can be derived the Label Switched Paths to release.

7. A telecommunication network with a plurality of routers (A, B, C, D, E) interconnected via links through which Label Switched Paths (LSP) are established,  
15 said routers being linked in cascade according to a Main Path (AB, BC, CD, DE) and being further linked in another order according to at least one Detour Path (ac, ce; bd),

and said routers being adapted to transmit a Path\_Tear Message towards downstream-located routers, said Path\_Tear Message  
20 indicating that a Label Switched Path (LSP) has to be released,

**characterized in that** the router transmitting said Path\_Tear Message is adapted to include in said Path\_Tear Message a tag indicating, to the router receiving said Path\_Tear Message, whether said Path\_Tear Message should be immediately forwarded  
25 towards a downstream-located router,

**and in that** the receiving router is adapted to detect said tag in said received Path\_Tear Message, to release each Label Switched Path indicated by said tag, and, according to said tag, to forward immediately said Path\_Tear  
30 Message towards said downstream-located router.



8. The telecommunication network according to claim 7,  
**characterized in that** said tag further indicates through which path  
said Path\_Tear Message should be forwarded downstream,

5           **and in that**, according to said tag, said receiving router is  
further adapted to forward immediately said Path\_Tear Message  
towards said downstream-located router through said Main Path (AB,  
BC, CD, DE) or through said Detour Path (ac, ce, bd) or through both.

10           9. The telecommunication network according to claim 7,  
**characterized in that** said receiving router is adapted to release all  
the Label Switched Paths (LSPs) arriving at said receiving router from  
upstream-located routers via said Main Path (AB, BC, CD, DE) and via  
said Detour Path (ac, ce, bd) linking said upstream-located routers and  
15   said receiving router.

10. The telecommunication network according to claim 7,  
**characterized in that** said tag further indicates which Label  
Switched Paths (LSPs) to be released,

20           **and in that** said receiving router is adapted to release  
immediately each Label Switched Path indicated by said tag.

11. The telecommunication network according to claim 7,  
**characterized in that** said receiving router is further adapted to  
25   transmit, towards an upstream-located router, a Reserved\_Tear  
Message including a said tag,

**in that** said upstream-located router is adapted to transmit  
said Reserved\_Tear Message towards a downstream-located router,

**and in that** said downstream-located router is adapted

to immediately generate a Path\_Tear Message including said tag,  
and

to immediately forward said Path\_Tear Message towards another  
downstream-located router.

5

12. The telecommunication network according to claim 7,  
**characterized in that** both said Main Path (AB, BC, CD, DE) and at  
least one Detour Path (ac, ce; bd) arrive at said receiving router.

10

13. The telecommunication network according to claim 7,  
**characterized in that** said telecommunication network is a Multi-  
Protocol Label Switching [MPLS] telecommunication network.

15 14. The telecommunication network according to any of the  
claims 7 to 13, **characterized in that** said routers are adapted to  
operate according to the release method as mentioned in any of the  
claims 1 to 6.

**ABSTRACT**  
**TELECOMMUNICATION NETWORK WITH FAST-REROUTE**  
**FEATURES**

A telecommunication network with fast-reroute features wherein  
5 a method is used to release, by means of a "Path\_Tear Message", a  
Label Switched Path [LSP] established between linked routers (A, B,  
C, D, E). The routers are linked in cascade according to a Main Path  
(AB, BC, CD, DE) and are further linked in another order according to  
at least one Detour Path (ac, ce; bd). The Path\_Tear Message includes  
10 a tag indicating, in each router, whether this Path\_Tear Message  
should be immediately forwarded towards a downstream-located router  
or not. It is thereby possible to obtain a faster release of any unused  
Label Switched Path [LSP] than waiting for a timeout of 1 to 2  
minutes, as it is currently the case.

15

Fig. 2 is attached to the abstract



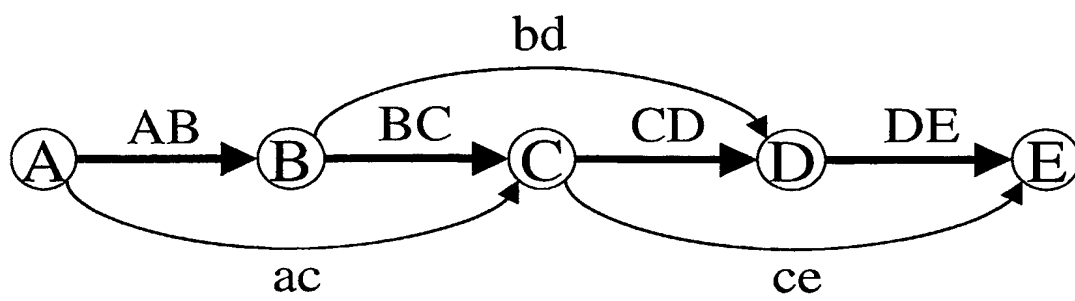


Fig. 1

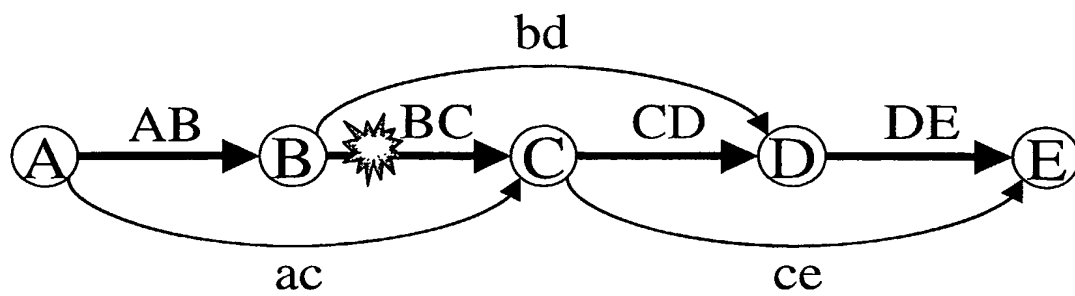


Fig. 2

